

shindaiwa®

EB2510 and EB3410 Blowers



**Powered by
Shindaiwa's
C4 Technology®
engines, these
blowers combine
remarkable
performance
with low engine
tone, low
emissions and
exceptional
fuel economy.**

shindaiwa®

EB2510 and EB3410 Blowers

The multi-function operating handle incorporates an anti-vibration system to greatly reduce vibration felt by the operator.

Special nozzle angle reduces blower twisting from torque

All position, hands free cruise control

EB2510




Positive lock blower tubes, keep tubes firmly attached to blower

Heavy-duty air filter element is easily accessible, no tools required for routine maintenance

Special "Hush Mode" switch instantly converts unit to a preset low noise level

Oversized, easy-to-remove, captivated fuel cap

EB3410

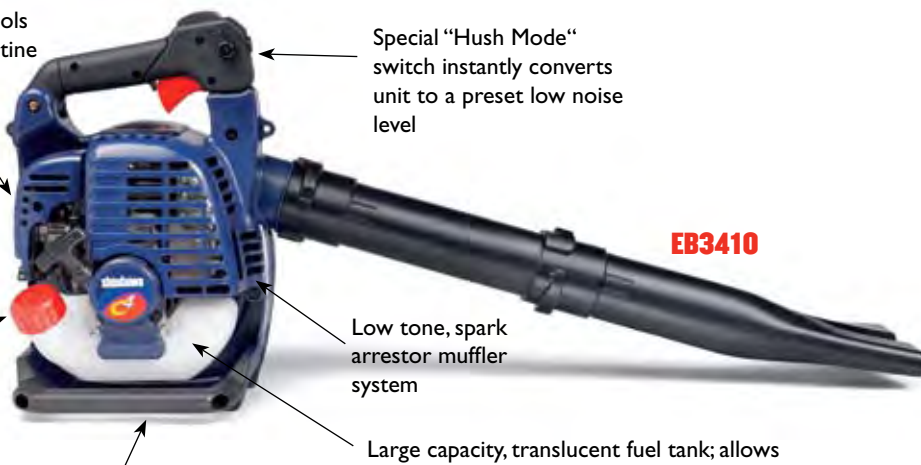


Low tone, spark arrestor muffler system

Large capacity, translucent fuel tank; allows operator to determine fuel level at a glance

Fuel tank protector, secondary handle system for operator comfort and convenience



Shindaiwa's patented C4 Technology® delivers the best of both 2-cycle and 4-cycle engines. Stronger. Smoother. Quieter.



- Incredible torque.
- Quick throttle response.
- No sump. No dipstick. No oil changes.
- Uses 50:1 mixed fuel.
- Excellent fuel economy.
- Meets stringent EPA and California exhaust emission regulations.

Specifications

	EB2510	EB3410
Displacement	1.5 cu in (24.5 cc)	2.1 cu in (34 cc)
Output	1.1 hp (0.8 kW)	1.4 hp (1.0 kW)
Weight*	10.8 lbs (4.9 kg)	11.2 lbs (5.1 kg)
Weight**	11.4 lbs (5.2 kg)	11.7 lbs (5.3 kg)
Air Volume @ Nozzle	331 CFM (562.3 m ³ /h)	398 CFM (676.2 m ³ /h)
Air Speed @ Nozzle	191 mph (85.4 m/s)	199 mph (89.0 m/s)
Carburetor	Walbro Barrel-valve	Walbro Barrel-valve
Fuel Capacity	20 fl. oz. (591 ml)	20 fl. oz. (591 ml)
Fuel, 50:1 Ratio	Fuel/Mixing Oil	Fuel/Mixing Oil

*Without tubes

**With standard tubes

Additional Features

- Comfortable rubber coated handle includes: Thumb operated on/off switch, throttle trigger, all position hands free "cruise control" and special "hush mode" switch.
- Walbro purge pump carburetor allows easy starting, fast acceleration and smooth power throughout the RPM range.

EB2510 optional fan tip nozzle standard equipment on the EB3410.



shindaiwa®

First to Start. Last to Quit.
www.shindaiwa.com

Your Dealer:

Area for distributor/dealer

Timberland Supply Co. Ltd.
1520 Lorne Street
Kamloops, BC, V2C 1X6
(250) 372-9561 / (800) 563-5223
web: www.timberland-supply.com